

# ASEC Push To Exit Blue Dome DDA Exit Button

DDA · Asec · 1 variant


PRICING

From **£125.27 ex VAT**

£150.32 inc VAT

1 variant available  
VAT 20.00%

Product Imagery

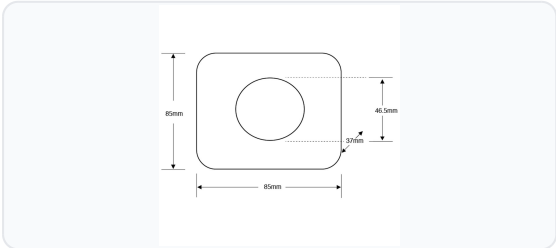

Specification Summary

|              |      |
|--------------|------|
| Brand        | Asec |
| Product type | DDA  |

Product Description

The Asec Push To Exit Blue Dome DDA Exit Button is a highly durable and accessible egress solution designed to assist with Disability Discrimination Act (DDA) compliance. Featuring a large, high-visibility blue dome button on a flush-fitting plate, it is exceptionally easy to operate from any angle, making it ideal for users with limited dexterity or physical impairments.

Built for demanding environments, this exit button features a robust powder-coated stainless steel plate finished in RAL 9016 white. It boasts an impressive Impact Rating of 9 and an IP67 weatherproof rating on the front, ensuring reliable performance in high-traffic or exposed areas.

Installation is straightforward thanks to the included flush-mounting box and pre-wired 150mm flying leads. The integrated SPDT microswitch provides momentary operation with both Normally Open (N/O) and Normally Closed (N/C) outputs, offering excellent compatibility with a wide range of electronic locking and access control systems. Tested to 1,000,000 mechanical operations, this button offers long-term reliability you can trust.

## Technical Specifications

- **Brand:** Asec
- **Part Number:** AS9850
- **Plate Finish:** Powder-coated stainless steel (RAL 9016 White)
- **Fitting:** Flush
- **Input Voltage:** 12V AC/DC
- **IP Rating:** IP67 (Front only)
- **Impact Rating:** 9
- **Operation:** Momentary
- **Outputs:** Normally Open (N/O) & Normally Closed (N/C)
- **Switch Type:** SPDT microswitch
- **Mechanical Life:** 1,000,000 operations
- **Dimensions:** 85mm (W) x 37mm (D)
- **Wiring:** 150mm flying leads

## Key Features

- **DDA Compliant Design:** Large, high-visibility blue dome button is easy to operate from any angle, assisting users with limited dexterity.
- **Robust Construction:** Powder-coated stainless steel plate with an Impact Rating of 9 for high durability.
- **Weatherproof Front:** IP67 rated front face protects against dust and water ingress.
- **Easy Installation:** Supplied complete with a flush-mounting box and 150mm pre-wired flying leads.
- **Clear Signage:** Features a bold, clear "Push To Exit" legend.
- **Long Service Life:** Tested to withstand up to 1,000,000 mechanical operations.

## Variant Specifications And Pricing

| Image                                                                             | Part Number | Ex VAT  | Inc VAT | Attributes / Specs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-----------------------------------------------------------------------------------|-------------|---------|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | AS9850      | £125.27 | £150.32 | <p><b>Barcode:</b> 5055120684055</p> <p><b>Brand:</b> Asec</p> <p><b>Depth:</b> 37mm</p> <p><b>Finish:</b> Stainless Steel</p> <p><b>Fitting:</b> Flush</p> <p><b>Illumination:</b> No</p> <p><b>Input Voltage:</b> 12V AC/DC</p> <p><b>IP Rating:</b> IP67 (Front Only)</p> <p><b>Legend:</b> Push To Exit</p> <p><b>Manufacturer Reference:</b> AS9850</p> <p><b>Mechanical Life:</b> 1,000,000 Operations</p> <p><b>Notes:</b> Impact Rating 9</p> <p><b>Operation:</b> Momentary</p> <p><b>Outputs:</b> N/O &amp; N/C</p> <p><b>Pack Quantity:</b> 1</p> <p><b>Packaging:</b> Boxed</p> <p><b>Rating:</b> Impact Rating 9</p> <p><b>Weight:</b> 375g</p> <p><b>Width:</b> 85mm</p> |

## Brand Profile

Asec



**ASEC** is a **trade-focused security hardware brand** built around the “everyday kit” locksmiths and installers reach for, with a big emphasis on **breadth, availability, and value** rather than boutique-only spec pieces. The brand was **established in 2003** and was created specifically to **support independent retailers and security professionals** with products that “*would never become available through the large multiple retailers.*”

Where ASEC gets especially interesting (and why it tends to become a “default stock brand”) is the **scale of the range**:

- ASEC positions itself as having a portfolio of **2,000+ individual products**, described as one of the **largest ranges under a single security brand name** in the industry.
- Coverage is intentionally broad across the core trade categories: **Access Control, Architectural Hardware, Key Cutting, Locking Products, UPVC, Tools & Accessories.**

ASEC is **exclusive to Aldridge Security** (whom we distribute) in the UK trade ecosystem (Aldridge explicitly calls itself the **exclusive distributor of ASEC Security Products worldwide**). That exclusivity is a big part of the brand's identity: it keeps the range aimed at the trade channel rather than getting diluted into mass retail.