

Camden Door Controls Infrared Exit Sensor

Miscellaneous · Camden Door Controls · 2 variants


PRICING

From £187.59 ex VAT

£225.11 inc VAT

2 variants available
VAT 20.00%

Product Imagery

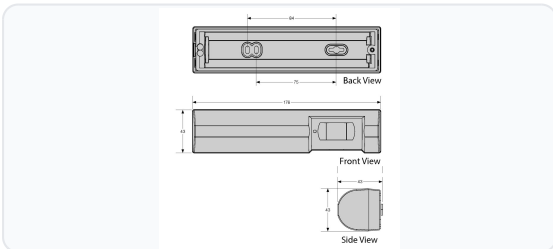

Specification Summary

Brand Camden Door Controls

Product type Miscellaneous

Product Description

The Camden Door Controls Infrared Exit Sensor is a high-performance active infrared detector designed to automate egress and access control systems. When movement is detected, the sensor instantly triggers a signal to initiate your system's next action - whether that is releasing an electronic lock to open a door, sounding an alert buzzer, or switching on a light.

Engineered for versatility and ease of installation, this compact sensor can be mounted at heights of up to 3 metres, making it ideal for a wide range of commercial and residential entryways. It features an exceptionally fast response time of 0.1 to 0.2 seconds and a 0.5-second relay hold time. With an IP45 weather-resistant rating, it is built to withstand challenging environments, operating reliably in temperatures ranging from -20°C to 60°C.

This exit sensor is available in both Black and White finishes to seamlessly blend with your door frame or surrounding decor. Please select your preferred finish, barcode, and manufacturer reference from the options below.



Technical Specifications

- **Input Voltage:** 12/24V AC/DC
- **Current Consumption:** 1.7A @ 12V DC / 0.11A @ 12V AC / 0.6A @ 24V DC / 2.1A @ 24V AC
- **Dimensions:** 17.6cm (L) x 43mm (H) x 43mm (D)
- **Operating Temperature:** -20°C to 60°C
- **Humidity:** 0-90% non-condensing
- **Response Time:** 0.1 to 0.2 seconds
- **Relay Hold Time:** 0.5 seconds
- **Installation Height:** Up to 3m
- **Weather Resistance:** IP45
- **Weight:** 350g
- **Pack Quantity:** 1

Key Features

- **Active Infrared Detection:** Instantly triggers system actions such as opening doors, sounding buzzers, or turning on lights upon detecting movement.
- **Fast Response:** Features an ultra-fast 0.1 to 0.2 second response time with a 0.5-second relay hold time.
- **Weather Resistant:** IP45-rated housing ensures reliable performance in outdoor or challenging environments.
- **Versatile Mounting:** Compact design allows for easy installation at heights of up to 3 metres.
- **Multiple Options:** Available in Black (CM-RQE70-B) or White (CM-RQE70-W) finishes to suit your installation requirements (please choose from the options below).

Variant Specifications And Pricing

Image	Part Number	Ex VAT	Inc VAT	Attributes / Specs
	L31727	£187.59	£225.11	<p>Barcode: 5056240121130</p> <p>Brand: Camden Door Controls</p> <p>Current Consumption: 1.7A @ 12V DC / 0.11A @ 12V AC / 0.6A @ 24V DC / 2.1A @ 24V AC</p> <p>Depth: 43mm</p> <p>Finish: White</p> <p>Height: 43mm</p> <p>Humidity: 0-90% non condensing</p> <p>Input Voltage: 12/24V AC/DC</p> <p>Length: 17.6cm</p> <p>Manufacturer Reference: CM-RQE70-W</p> <p>Operating Temperature: -20°C to 60°C</p> <p>Pack Quantity: 1</p> <p>Packaging: Boxed</p> <p>Weight: 350g</p> <p>Width: 17.6cm</p>
	L31728	£187.59	£225.11	<p>Barcode: 5056240121147</p> <p>Brand: Camden Door Controls</p> <p>Current Consumption: 1.7A @ 12V DC / 0.11A @ 12V AC / 0.6A @ 24V DC / 2.1A @ 24V AC</p> <p>Depth: 43mm</p> <p>Finish: Black</p> <p>Height: 43mm</p> <p>Humidity: 0-90% non condensing</p> <p>Input Voltage: 12/24V AC/DC</p> <p>Length: 17.6cm</p> <p>Manufacturer Reference: CM-RQE70-B</p> <p>Operating Temperature: -20°C to 60°C</p> <p>Pack Quantity: 1</p> <p>Packaging: Boxed</p> <p>Weight: 350g</p> <p>Width: 17.6cm</p>

Brand Profile

Camden Door Controls

No brand description provided.