

ICS A-Series 12/24VDC Standard Double Magnet

ICS · ICS · 4 variants

PRICING

From £109.83 ex VAT


£131.80 inc VAT

4 variants available

VAT 20.00%

Range: £109.83 - £129.63 ex VAT

Product Imagery

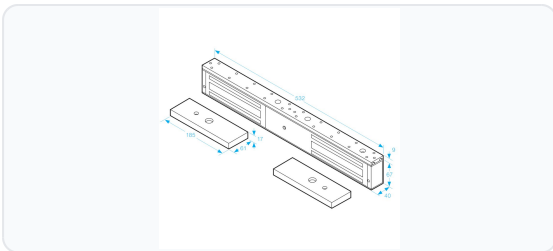

Specification Summary

Brand ICS

Product type ICS

Product Description

The ICS 12/24VDC Standard Double Magnet range offers robust, reliable electric locking for double doors, making it an ideal choice for commercial, public, and high-traffic access control systems. Designed for surface-mount installation, these high-quality magnetic locks are constructed from durable aluminium with a clean satin anodised finish.

This versatile range is available in several configurations to suit your specific security and installation requirements. Depending on the model selected, the magnets offer a holding force of either 272kg (600lbs) or 545kg (1200lbs) per door. You can also choose between monitored and non-monitored versions to integrate seamlessly with your door

status monitoring systems. Please select your preferred holding force, monitoring configuration, and dimensions from the options below.

Operating on a dual-voltage 12/24V DC input, these maglocks feature fail-safe operation (fail unlocked), ensuring doors automatically release in the event of a power loss to allow safe emergency egress.

Technical Specifications

- **Input Voltage:** 12/24V DC
- **Holding Force:** 272kg (600lbs) or 545kg (1200lbs) per door (please choose from the options below)
- **Monitoring:** Available in Monitored or Non-Monitored options (please choose below)
- **Operation:** Fail-safe (fail unlocked)
- **Material & Finish:** Aluminium with Satin Anodised Aluminium finish
- **Fitting:** Surface mounted
- **Armature Dimensions:** 185mm (L) x 61mm - 62mm (H) x 16mm - 17mm (D) (please choose below)
- **Magnet Dimensions:** 530mm - 532mm (L) x 40mm - 67mm (H) x 40mm (D) (please choose below)
- **Current Consumption:** 0.5A @ 12V / 0.25A @ 24V per door, or 420mA @ 12V / 210mA @ 24V per door (please choose below)
- **Operating Temperature:** -10°C to 55°C
- **Operating Humidity:** 0% to 95% non-condensing
- **Weight:** 9.3kg or 9.6kg (please choose below)
- **Guarantee:** 1 Year

Key Features

- **Double Door Locking:** Designed specifically for double door access control applications.
- **Fail-Safe Security:** Automatically unlocks in the event of a power failure to ensure safe emergency egress.
- **Flexible Holding Force:** Available in 272kg (600lbs) or 545kg (1200lbs) per door options to suit your security level.
- **Monitoring Options:** Choose between monitored and non-monitored versions for seamless integration with access control systems.
- **Durable Construction:** Built from high-quality aluminium with a professional satin anodised finish.
- **Wide Temperature Range:** Operates reliably in temperatures ranging from -10°C to 55°C.

Variant Specifications And Pricing


Image	Part Number	Ex VAT	Inc VAT	Attributes / Specs
	L24134	£122.55	£147.06	<p> Armature Depth: 16mm Armature Height: 62mm Armature Length: 185mm Barcode: 5055120756905 Brand: ICS Current Consumption: 0.5A @ 12V / 0.25A @ 24V Per Door Finish: Satin Anodised Aluminium Fitting: Surface Guarantee: 1 Year Handed: Outward Opening Holding Force: 545Kg / 1200Lbs Per Door Input Voltage: 12/24V DC Magnet Depth: 40mm Magnet Height: 67mm Magnet Length: 530mm Manufacturer Reference: A-10060 Material: Aluminium Monitored: No Notes: Non Monitored Operation: Fail Unlocked Pack Quantity: 1 Packaging: Boxed Plate Depth: 16mm Plate Height: 61mm Plate Width: 185mm Weather Resistant: No Weight: 9.3Kg </p>


Image	Part Number	Ex VAT	Inc VAT	Attributes / Specs
	L24135	£129.63	£155.56	<p> Armature Depth: 16mm Armature Height: 62mm Armature Length: 185mm Barcode: 5055120756912 Brand: ICS Current Consumption: 0.5A @ 12V / 0.25A @ 24V Per Door Finish: Satin Anodised Aluminium Fitting: Surface Guarantee: 1 Year Handed: Outward Opening Holding Force: 545Kg / 1200Lbs Per Door Input Voltage: 12/24V DC Magnet Depth: 40mm Magnet Height: 67mm Magnet Length: 530mm Manufacturer Reference: A-10040 Material: Aluminium Monitored: Yes Notes: Monitored Operation: Fail Unlocked Pack Quantity: 1 Packaging: Boxed Plate Depth: 16mm Plate Height: 61mm Plate Width: 185mm Weather Resistant: No Weight: 9.3Kg </p>

Image	Part Number	Ex VAT	Inc VAT	Attributes / Specs
	L32523	£109.83	£131.80	<p>Armature Depth: 17mm Armature Height: 61mm Armature Length: 185mm Barcode: 5056240125244 Brand: ICS Current Consumption: 420mA at 12Vdc, 210 mA at 24Vdc (at temperature 20 degrees celcius) Depth: 40mm Finish: Satin Anodised Aluminium Height: 40mm Holding Force: 272Kg / 600Lbs Per Door Input Voltage: 12/24V DC Manufacturer Reference: U10060 Monitored: No Notes: Non Monitored Operation: Fail Safe - Unlocked Pack Quantity: 1 Weight: 9.6Kg Width: 53.2cm</p>
	L32524	£112.69	£135.23	<p>Armature Depth: 17mm Armature Height: 61mm Armature Length: 185mm Barcode: 5056240125251 Brand: ICS Current Consumption: 420mA at 12Vdc, 210 mA at 24Vdc (at temperature 20 degrees celcius) Depth: 40mm Finish: Satin Anodised Aluminium Height: 40mm Holding Force: 272Kg / 600Lbs Per Door Input Voltage: 12/24V DC Manufacturer Reference: U10040 Monitored: Yes Notes: Monitored Operation: Fail Safe - Unlocked Pack Quantity: 1 Weight: 9.6Kg Width: 53.2cm</p>

Brand Profile

ICS



ICS Security (ICS Security Solutions Ltd) is a UK access-control hardware brand and supplier focused on the “nuts and bolts” of electronic door control: **maglocks, electric locks/bolts, strikes, lock releases, and packaged locking kits** designed to make access-control installs cleaner and more reliable. They describe themselves as an access-control specialist founded in **2003**, with **20+ years** in the sector.

They operate from **Blisworth, Northamptonshire** (Units 1–2, JBJ Business Park, Northampton Road, NN7 3DW), supporting trade customers with a range that covers the common building blocks of access control systems.

Product-wise, ICS’s catalogue is very “installer reality”:

- **Magnetic locks** in multiple formats (standard, slimline/transom, stainless, monitored, with door status options), typically running **12–24V DC selectable** and specced by holding force (e.g., 600–1200 lbs and up).
- **Electric locks / bolts and locking kits**, including “compliant lock packages” that bundle the parts needed for controlled entry with free egress, calling out standards like **EN179 / EN1125** in their kit descriptions.
- A broader access-control “system parts” approach: they position the range as covering “all parts of access control systems,” aiming to let installers choose a complete solution from one source.