

# ICS Shear Magnet GS705 12/24VDC

ICS · ICS · 2 variants

**PRICING**

**From £264.34 ex VAT**

£317.21 inc VAT

2 variants available  
VAT 20.00%

## Product Imagery



## Specification Summary

Brand ICS


Product type ICS

The Shear Locking magnet is used to lock or unlock doors with locking time delay in applications where the door is required to be locked for a period of time after the door is closed. The unit is used to lock or unlock doors with a magnetic lock.

**WARRANTY**  
WARRANTY PERIOD: 12 MONTHS  
WARRANTY TYPE: FULL

**Other**  
12VDC  
24VDC  
30VDC  
48VDC  
60VDC  
72VDC  
96VDC  
120VDC  
144VDC  
168VDC  
192VDC  
216VDC  
240VDC  
264VDC  
288VDC  
312VDC  
336VDC  
360VDC  
384VDC  
408VDC  
432VDC  
456VDC  
480VDC  
504VDC  
528VDC  
552VDC  
576VDC  
600VDC  
624VDC  
648VDC  
672VDC  
696VDC  
720VDC  
744VDC  
768VDC  
792VDC  
816VDC  
840VDC  
864VDC  
888VDC  
912VDC  
936VDC  
960VDC  
984VDC  
1008VDC  
1032VDC  
1056VDC  
1080VDC  
1104VDC  
1128VDC  
1152VDC  
1176VDC  
1200VDC  
1224VDC  
1248VDC  
1272VDC  
1296VDC  
1320VDC  
1344VDC  
1368VDC  
1392VDC  
1416VDC  
1440VDC  
1464VDC  
1488VDC  
1512VDC  
1536VDC  
1560VDC  
1584VDC  
1608VDC  
1632VDC  
1656VDC  
1680VDC  
1704VDC  
1728VDC  
1752VDC  
1776VDC  
1800VDC  
1824VDC  
1848VDC  
1872VDC  
1896VDC  
1920VDC  
1944VDC  
1968VDC  
1992VDC  
2016VDC  
2040VDC  
2064VDC  
2088VDC  
2112VDC  
2136VDC  
2160VDC  
2184VDC  
2208VDC  
2232VDC  
2256VDC  
2280VDC  
2304VDC  
2328VDC  
2352VDC  
2376VDC  
2400VDC  
2424VDC  
2448VDC  
2472VDC  
2496VDC  
2520VDC  
2544VDC  
2568VDC  
2592VDC  
2616VDC  
2640VDC  
2664VDC  
2688VDC  
2712VDC  
2736VDC  
2760VDC  
2784VDC  
2808VDC  
2832VDC  
2856VDC  
2880VDC  
2904VDC  
2928VDC  
2952VDC  
2976VDC  
3000VDC  
3024VDC  
3048VDC  
3072VDC  
3096VDC  
3120VDC  
3144VDC  
3168VDC  
3192VDC  
3216VDC  
3240VDC  
3264VDC  
3288VDC  
3312VDC  
3336VDC  
3360VDC  
3384VDC  
3408VDC  
3432VDC  
3456VDC  
3480VDC  
3504VDC  
3528VDC  
3552VDC  
3576VDC  
3600VDC  
3624VDC  
3648VDC  
3672VDC  
3696VDC  
3720VDC  
3744VDC  
3768VDC  
3792VDC  
3816VDC  
3840VDC  
3864VDC  
3888VDC  
3912VDC  
3936VDC  
3960VDC  
3984VDC  
4008VDC  
4032VDC  
4056VDC  
4080VDC  
4104VDC  
4128VDC  
4152VDC  
4176VDC  
4200VDC  
4224VDC  
4248VDC  
4272VDC  
4296VDC  
4320VDC  
4344VDC  
4368VDC  
4392VDC  
4416VDC  
4440VDC  
4464VDC  
4488VDC  
4512VDC  
4536VDC  
4560VDC  
4584VDC  
4608VDC  
4632VDC  
4656VDC  
4680VDC  
4704VDC  
4728VDC  
4752VDC  
4776VDC  
4800VDC  
4824VDC  
4848VDC  
4872VDC  
4896VDC  
4920VDC  
4944VDC  
4968VDC  
4992VDC  
5016VDC  
5040VDC  
5064VDC  
5088VDC  
5112VDC  
5136VDC  
5160VDC  
5184VDC  
5208VDC  
5232VDC  
5256VDC  
5280VDC  
5304VDC  
5328VDC  
5352VDC  
5376VDC  
5400VDC  
5424VDC  
5448VDC  
5472VDC  
5496VDC  
5520VDC  
5544VDC  
5568VDC  
5592VDC  
5616VDC  
5640VDC  
5664VDC  
5688VDC  
5712VDC  
5736VDC  
5760VDC  
5784VDC  
5808VDC  
5832VDC  
5856VDC  
5880VDC  
5904VDC  
5928VDC  
5952VDC  
5976VDC  
6000VDC  
6024VDC  
6048VDC  
6072VDC  
6096VDC  
6120VDC  
6144VDC  
6168VDC  
6192VDC  
6216VDC  
6240VDC  
6264VDC  
6288VDC  
6312VDC  
6336VDC  
6360VDC  
6384VDC  
6408VDC  
6432VDC  
6456VDC  
6480VDC  
6504VDC  
6528VDC  
6552VDC  
6576VDC  
6600VDC  
6624VDC  
6648VDC  
6672VDC  
6696VDC  
6720VDC  
6744VDC  
6768VDC  
6792VDC  
6816VDC  
6840VDC  
6864VDC  
6888VDC  
6912VDC  
6936VDC  
6960VDC  
6984VDC  
7008VDC  
7032VDC  
7056VDC  
7080VDC  
7104VDC  
7128VDC  
7152VDC  
7176VDC  
7200VDC  
7224VDC  
7248VDC  
7272VDC  
7296VDC  
7320VDC  
7344VDC  
7368VDC  
7392VDC  
7416VDC  
7440VDC  
7464VDC  
7488VDC  
7512VDC  
7536VDC  
7560VDC  
7584VDC  
7608VDC  
7632VDC  
7656VDC  
7680VDC  
7704VDC  
7728VDC  
7752VDC  
7776VDC  
7800VDC  
7824VDC  
7848VDC  
7872VDC  
7896VDC  
7920VDC  
7944VDC  
7968VDC  
7992VDC  
8016VDC  
8040VDC  
8064VDC  
8088VDC  
8112VDC  
8136VDC  
8160VDC  
8184VDC  
8208VDC  
8232VDC  
8256VDC  
8280VDC  
8304VDC  
8328VDC  
8352VDC  
8376VDC  
8400VDC  
8424VDC  
8448VDC  
8472VDC  
8496VDC  
8520VDC  
8544VDC  
8568VDC  
8592VDC  
8616VDC  
8640VDC  
8664VDC  
8688VDC  
8712VDC  
8736VDC  
8760VDC  
8784VDC  
8808VDC  
8832VDC  
8856VDC  
8880VDC  
8904VDC  
8928VDC  
8952VDC  
8976VDC  
9000VDC  
9024VDC  
9048VDC  
9072VDC  
9096VDC  
9120VDC  
9144VDC  
9168VDC  
9192VDC  
9216VDC  
9240VDC  
9264VDC  
9288VDC  
9312VDC  
9336VDC  
9360VDC  
9384VDC  
9408VDC  
9432VDC  
9456VDC  
9480VDC  
9504VDC  
9528VDC  
9552VDC  
9576VDC  
9600VDC  
9624VDC  
9648VDC  
9672VDC  
9696VDC  
9720VDC  
9744VDC  
9768VDC  
9792VDC  
9816VDC  
9840VDC  
9864VDC  
9888VDC  
9912VDC  
9936VDC  
9960VDC  
9984VDC  
10000VDC

Customer should check the use and installation instructions. Failure to observe polarity will result in a short circuit and may be covered by the manufacturer warranty.

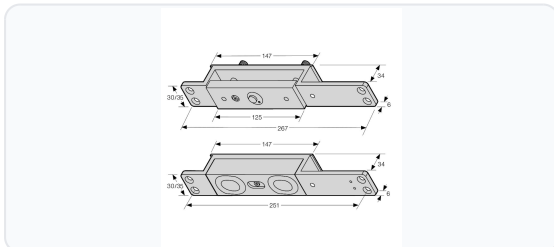

## Product Description

The ICS GS705 Shear Magnet is a high-security, discreet electric locking solution designed for mortice installation, allowing it to be fully concealed within the door and frame. It is suitable for both horizontal mounting in the transom or vertical mounting in the frame jamb, making it highly versatile for various door types.

This shear lock operates on a dual 12/24V DC voltage and features a fail-unlocked (fail-safe) operation, ensuring the door automatically unlocks in the event of a power failure to maintain safety. It provides an impressive holding force of up to 2,700lbs (1,226kg) in shear and includes an adjustable locking time delay of between 1 and 6 seconds. Additionally, the built-in magnetic bond sensor monitor output allows for remote tracking of the door's locked or unlocked status.

The ICS GS705 is available in two widths - 30mm (GS705-30) and 35mm (GS705-35). Please select your required width and manufacturer reference from the options below.

## Technical Specifications

- **Input Voltage:** 12/24V DC
- **Current Consumption:** Pull 2.2A / Hold 0.5A (at 12V DC); Pull 1.4A / Hold 0.3A (at 24V DC)
- **Holding Force:** 1,226kg (2,700lbs) in shear
- **Operation:** Fail Unlocked (Fail Safe)
- **Monitoring:** Yes (N.C. Output - door opened; N.O. Output - door closed)
- **Fitting:** Mortice
- **Width:** 30mm or 35mm (please select from the options below)
- **Length:** 26.7cm
- **Depth:** 34mm
- **Magnet Length:** 125mm
- **Plate Depth:** 6mm
- **Screw Centres:** 251mm
- **Operating Temperature:** -30°C to 55°C
- **Weight:** 1.5kg
- **Finish:** Black powder-coated housing with zinc-finished magnet and armature plate

## Key Features

- **Discreet Security:** Mortice-mounted design allows the lock to be fully concealed within the door and frame.
- **High Holding Force:** Delivers up to 2,700lbs (1,226kg) of shear holding force for robust security.
- **Fail-Safe Operation:** Automatically unlocks during a power failure to ensure safe egress.
- **Adjustable Time Delay:** Features an adjustable locking relock time delay of 1 to 6 seconds.
- **Integrated Monitoring:** Built-in magnetic bond sensor monitor output remotely tracks door lock/unlock status.
- **Flexible Installation:** Can be fitted horizontally or vertically to suit various door configurations.

## Variant Specifications And Pricing



Image	Part Number	Ex VAT	Inc VAT	Attributes / Specs
	L33156	£264.34	£317.21	<p><b>Barcode:</b> 5056240129518</p> <p><b>Brand:</b> ICS</p> <p><b>Current Consumption:</b> Pull 2.2A Hold 0.5A at 12Vdc &amp; Pull 1.4A Hold 0.3A at 24Vdc</p> <p><b>Depth:</b> 34mm</p> <p><b>Finish:</b> Black</p> <p><b>Fitting:</b> Mortice</p> <p><b>Handed:</b> No</p> <p><b>Holding Force:</b> 1,226Kg / 2,700Lbs In Shear</p> <p><b>Input Voltage:</b> 12/24V DC</p> <p><b>Length:</b> 26.7cm</p> <p><b>Magnet Length:</b> 125mm</p> <p><b>Manufacturer Reference:</b> GS705-30</p> <p><b>Monitored:</b> Yes</p> <p><b>Operating Temperature:</b> -30°C to 55°C</p> <p><b>Operation:</b> Fail Unlocked</p> <p><b>Outputs:</b> N.C. Output-door opened; N.O. Output- door closed</p> <p><b>Pack Quantity:</b> 1</p> <p><b>Plate Depth:</b> 6mm</p> <p><b>Screw Centres:</b> 251mm</p> <p><b>Weight:</b> 1.5Kg</p> <p><b>Width:</b> 30mm</p>

Image	Part Number	Ex VAT	Inc VAT	Attributes / Specs
	L33157	£264.34	£317.21	<p><b>Barcode:</b> 5056240129525</p> <p><b>Brand:</b> ICS</p> <p><b>Current Consumption:</b> Pull 2.2A Hold 0.5A at 12Vdc &amp; Pull 1.4A Hold 0.3A at 24Vdc</p> <p><b>Depth:</b> 34mm</p> <p><b>Finish:</b> Black</p> <p><b>Fitting:</b> Mortice</p> <p><b>Handed:</b> No</p> <p><b>Holding Force:</b> 1,226Kg / 2,700Lbs In Shear</p> <p><b>Input Voltage:</b> 12/24V DC</p> <p><b>Length:</b> 26.7cm</p> <p><b>Magnet Length:</b> 125mm</p> <p><b>Manufacturer Reference:</b> GS705-35</p> <p><b>Monitored:</b> Yes</p> <p><b>Operating Temperature:</b> -30°C to 55°C</p> <p><b>Operation:</b> Fail Unlocked</p> <p><b>Outputs:</b> N.C. Output-door opened; N.O. Output- door closed</p> <p><b>Pack Quantity:</b> 1</p> <p><b>Plate Depth:</b> 6mm</p> <p><b>Screw Centres:</b> 251mm</p> <p><b>Weight:</b> 1.5Kg</p> <p><b>Width:</b> 35mm</p>

## Brand Profile

ICS



**ICS Security (ICS Security Solutions Ltd)** is a UK access-control hardware brand and supplier focused on the “nuts and bolts” of electronic door control: **maglocks, electric locks/bolts, strikes, lock releases, and packaged locking kits** designed to make access-control installs cleaner and more reliable. They describe themselves as an access-control specialist founded in **2003**, with **20+ years** in the sector.

They operate from **Blisworth, Northamptonshire** (Units 1–2, JBJ Business Park, Northampton Road, NN7 3DW), supporting trade customers with a range that covers the common building blocks of access control systems.

Product-wise, ICS’s catalogue is very “installer reality”:

- **Magnetic locks** in multiple formats (standard, slimline/transom, stainless, monitored, with door status options), typically running **12–24V DC selectable** and specced by holding force (e.g., 600–1200 lbs and up).
- **Electric locks / bolts and locking kits**, including “compliant lock packages” that bundle the parts needed for controlled entry with free egress, calling out standards like **EN179 / EN1125** in their kit descriptions.
- A broader access-control “system parts” approach: they position the range as covering “all parts of access control systems,” aiming to let installers choose a complete solution from one source.