
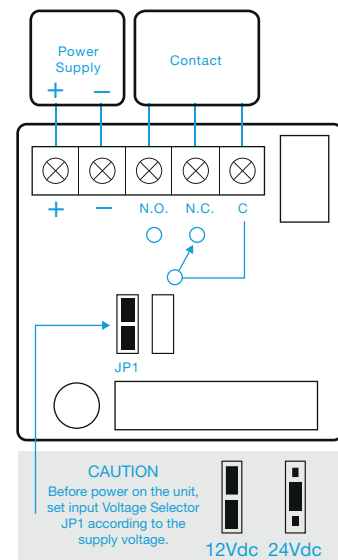
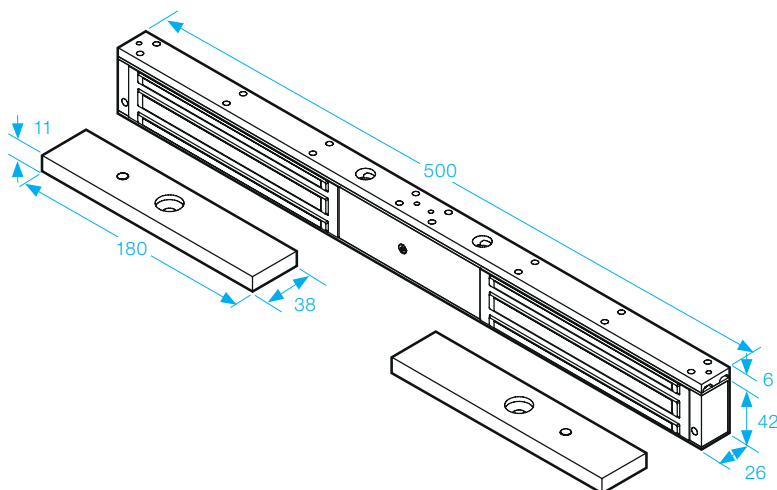


U10005 MONITORED**U10005DSU** MONITORED
WITH DOOR STATUS**Double Mini Magnet**

- Operating voltage 12~24Vdc (*Selectable*)
- Holding force up to 2 x 600lbs (272Kg)
- Aluminium housing
- Electroless Nickel Plated Armature
- Door status: An independent contact that works separately from the magnet to show door status not lock status
- Status LED ● Red ● Green

**OPTIONS****300BP****U320M****U300ZL****300ZLDC****U300AL****UGDB14****LD-MM-SC****SPECIFICATION**

- Voltage tolerance: $\pm 10\%$.
- Current draw: 480mA at 12Vdc, 240mA at 24Vdc (at temperature 20°C).
- Operating temperature: -10~55°C (14 to 131°F).
- Lock's surface temperature: Current temperature $\pm 20\%$ (when power is on).
- Humidity: 0~95% non-condensing.
- Weight: 3.7kg (approx).